


KMS-806 FORCED COMMUNICATION OF SCR TRAINER

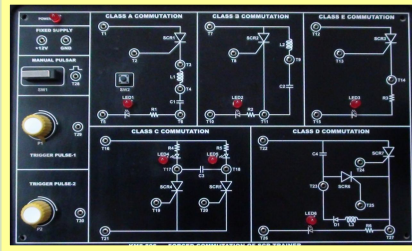

- One LED indicator to indicate Power input.
- Two Triggering Pulse Potentiometer
- One Manual Pulsar Switch.
- On-board Circuits
 - Class A Commutation
 - Class B Commutation
 - Class C Commutation
 - Class D Commutation
 - Class E Commutation
- Fixed DC power supply : + 12 V/150mA
- Variable DC power supply : 0 to + 30 V/150mA
- All interconnections are made using 2mm banana Patch cords.
- Bare board Tested Glass Epoxy PCB is used.
- Set of 2mm Patch cords for interconnections